

24*10/100/1000Base-T + 4*1G/2.5G SFP Layer 2 Managed Ethernet Switch

LT-S8228G-4GX24GT

Overview

SmartByte LT-S8228G-4GX24GT is the Layer 2 full gigabit managed switch, which provides high-density performance, powerful Layer 2 management with 68Gbps switching capacity. The LT-S8228G-4GX24GT provides comprehensive end to end QoS as well as flexible and rich management, security settings, which can meet the high speed, secure and smart requirement for small and medium-size enterprise networks based on cost effective price. The powerful network security features also make the LT-S8228G-4GX24GT performs effective data traffic control for ISP and enterprise VoIP, video streaming, and multicast applications.

Picture



Features

- 4*1G/2.5G SFP uplink, 24*10/100/1000Base-T downlink, 1*RJ45 console port for switch basic management and setup
- Port aggregation: Supports GE ports, 2.5GE port aggregation, static and dynamic aggregation
- VLAN : Supports access, trunk , hybrid mode and VLAN classification, including the Mac based VLAN, IP based VLAN and protocol based VLAN
- QinQ: Supports port-based, VLAN-based and flow-based QinQ
- Port Mirroring: Many to one port mirroring
- Layer 2 ring network protocol: Supports STP, RSTP, MSTP, G.8032 ERPS protocol, single ring, sub ring
- Multicast: Supports and IGMP snooping
- QoS: QoS class, remarking, Supports SP, WRR queue scheduling, Ingress/Egress port-based rate-limit and policy-based QoS
- Security: Support Dot1x, port authentication, mac authentication, RADIUS service; Support port-security, ip source guard, IP/Port/MAC binding, arp-check and ARP packet filtering for illegal users and port isolation
- Management : Supports LLDP, user management and login authentication; SNMPV1/V2C/V3; web management, HTTP1.1, HTTPS; Syslog and alarm grading ; RMON (Remote Monitoring) alarm, event and history record; NTP, temperature monitoring; Ping、Tracert and optical transceiver DDM function; Supports TFTP Client, Telnet Server, SSH Server and IPv6 Management
- Firmware update, configure backup/restore through Web GUI, FTP and TFTP


Technical specification

Model	LT-S8228G-4GX24GT
Fixed ports	4*1G /2.5G SFP slots, 24*10/100/1000M RJ45 ports
Management port	1*RJ45 Console
Switching capacity	68 Gbps
Packet forwarding rate	101Mpps
MAC address table	16K
Buffer	12M bit
Port aggregation	Support GE port, 2.5GE aggregation Support static and dynamic aggregation
Port features	Support IEEE802.3x flow control, Port traffic statistics, port isolation Support network storm suppression based on port bandwidth percentage
VLAN	Support access, trunk and hybrid mode
VLAN Classification	Mac Based VLAN IP Based VLAN Protocol Based VLAN
QinQ	Basic QinQ (Port-based QinQ) Flexible Q in Q(VLAN-based QinQ) QinQ(Flow-based QinQ)
Port mirroring	Many to one (Port Mirroring)
Layer 2 ring network protocol	Support STP、RSTP、MSTP Support G.8032 ERPS protocol, single ring, sub ring and other ring
DHCP	DHCP Client DHCP Snooping
Multicast	IGMP snooping

ACL	<p>IP Standard ACL</p> <p>MAC extend ACL</p> <p>IP extend ACL</p>
QoS	<p>QoS Class, Remarking</p> <p>Support SP, WRR queue scheduling</p> <p>Ingress Port-based Rate-limit</p> <p>Egress Port-based Rate-limit</p> <p>Policy-based QoS</p>
Security	<p>Support Dot1x, port authentication, mac authentication, RADIUS service</p> <p>Support port-security</p> <p>Support ip source guard, IP/Port/MAC binding</p> <p>Support arp-check and ARP packet filtering for illegal users</p> <p>Support port isolation</p>
Management and maintenance	<p>Support LLDP</p> <p>Support user management and login authentication</p> <p>Support SNMPV1/V2C/V3</p> <p>Support web management, HTTP1.1, HTTPS</p> <p>Support Syslog and alarm grading</p> <p>Support RMON (Remote Monitoring) alarm, event and history record</p> <p>Support NTP</p> <p>Support temperature monitoring</p> <p>Support Ping、Tracert</p> <p>Support optical transceiver DDM function</p> <p>Support TFTP Client</p> <p>Support Telnet Server</p> <p>Support SSH Server</p> <p>Support IPv6 Management</p> <p>Support FTP, TFTP, WEB upgrading</p>
Dimension(mm) (W*D*H)	440*245*44mm

Power supply	VAC input Rated voltage range: 100-240V Frequency: 50/60Hz
Fan	Support fan speed control
Consumption	≤40W
Power surge protection	6KV, IEC 61000-4-5 Level X (8/20us)
Ethernet ports surge protection	4KV, IEC 61000-4-5 Level 4 (10/700us)
Working temperature	0°C-50°C
Humidity	Working humidity: 10%-90%RH Storage humidity: 5%-95%RH

Structure diagram

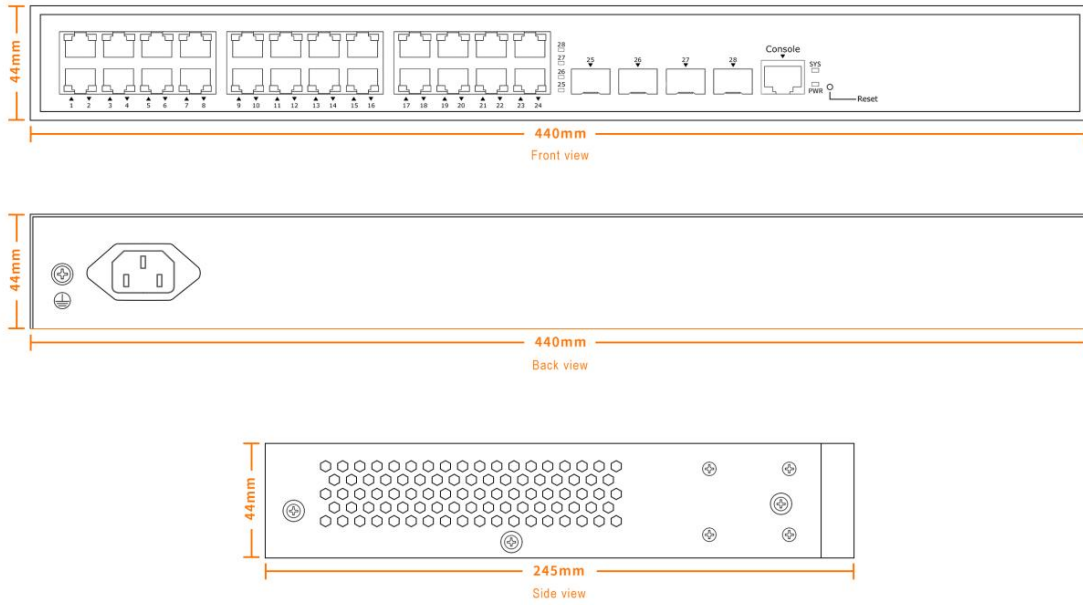

Order information

Model	Description
LT-S8228G-4GX24GT	Layer 2 managed Ethernet switch with 4*1G/2.5G SFP slots , 24*10/100/1000M RJ45 ports , AC 100-240V 50/60Hz